

## Installation Instructions

### 1999-2000 Honda Civic (Except D16Y5)



#### LEGAL NOTICE:

Buyer and installer releases Izze Racing from any liabilities regarding the use and installation of products sold by Izze Racing. These products may only be used for "Race" or "Off Road" vehicles. The buyer and installer of this product acknowledges and agrees that Izze Racing is not liable for any personal injury or vehicle damages or expenses or damages.

1)

---

Remove the passenger-side ECU/kick panel (right-hand side of passenger footwell) to reveal the ECU. If additional room is needed for wiring, unbolt the ECU from the chassis.

2)


---

Unplug ECU Connectors 32P & 31P. Disconnecting 32P and 31P will NOT reset the ECU.

3)

Wire the simulator as shown in Figure 1. As illustrated, the BLU, LT GRN/WHT, RED/YEL, and LT GRN OEM wires must be **cut** and the corresponding simulator wire spliced into the OEM wire leading **into the ECU**. Incorrectly wiring the simulator may permanently damage the module. Use a preexisting OEM bolt (e.g., one of the 10mm bolts used to mount the ECU) to fasten down the ground, as shown in Figure 1.

- Be absolutely sure you have the right wires.
- Incorrectly wiring the simulator may permanently damage the module.
- It is **HIGHLY** recommended that you crimp or solder all electrical connections.

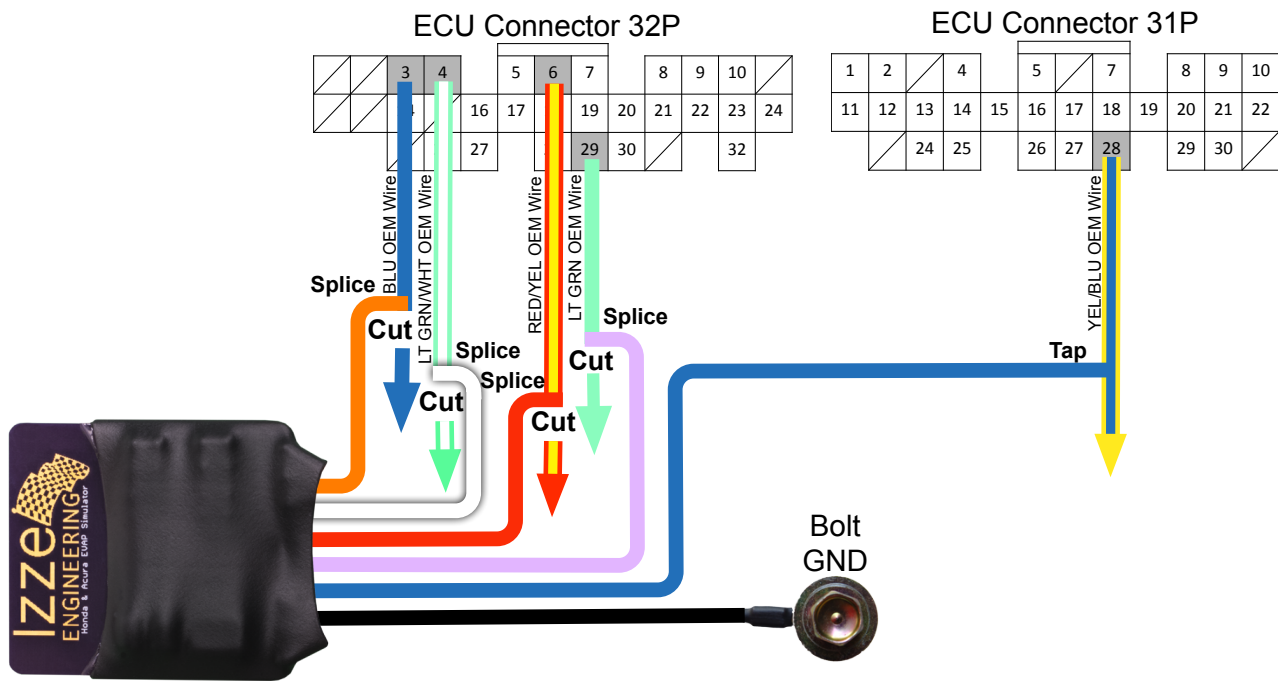

**Figure 1** Simulator wiring schematic.

4)

---

After the wiring is completed, mount the EVAP simulator module to a desired location – such as an OEM wiring harness – using the provided zip tie.

5)

---

Once the simulator has been wired, the EVAP system is redundant and may be removed – if desired. If the purge solenoid and it's associated plumbing is removed, use the included vinyl cap to seal off the intake manifold. **Please use common sense when dealing with gasoline vapors.**

Please contact us if you have any issues, questions, or comments at:

[support@izzeracing.com](mailto:support@izzeracing.com)